




INTERCOM DOOR STATION

VISPRO-IDS is a smart intercom door station designed for secure access and convenient entry communication. Featuring advanced facial recognition with anti-spoofing, HD audio-video interaction, and support for multiple access methods, including Face ID, QR, RFID Cards, PIN, and remote unlocking. It integrates seamlessly with the VISPRO ecosystem to deliver flexible, reliable access control for modern & residential facilities.



- ◆ 8-inch IPS touch interface delivering clear, responsive, and intuitive user interaction at entry points
- ◆ Dual-camera facial recognition with advanced anti-spoofing for secure and reliable identity verification
- ◆ Multi-credential access supporting Face ID, QR codes, RFID cards, PIN, and remote unlocking
- ◆ Intelligent noise-reduction audio ensuring clear two-way communication even in noisy outdoor environments
- ◆ Industrial-grade construction combining tempered glass and aluminum alloy for long-term durability
- ◆ High-protection outdoor rating with IP66 weather resistance and IK07 impact protection for harsh environments

TECHNICAL FEATURES

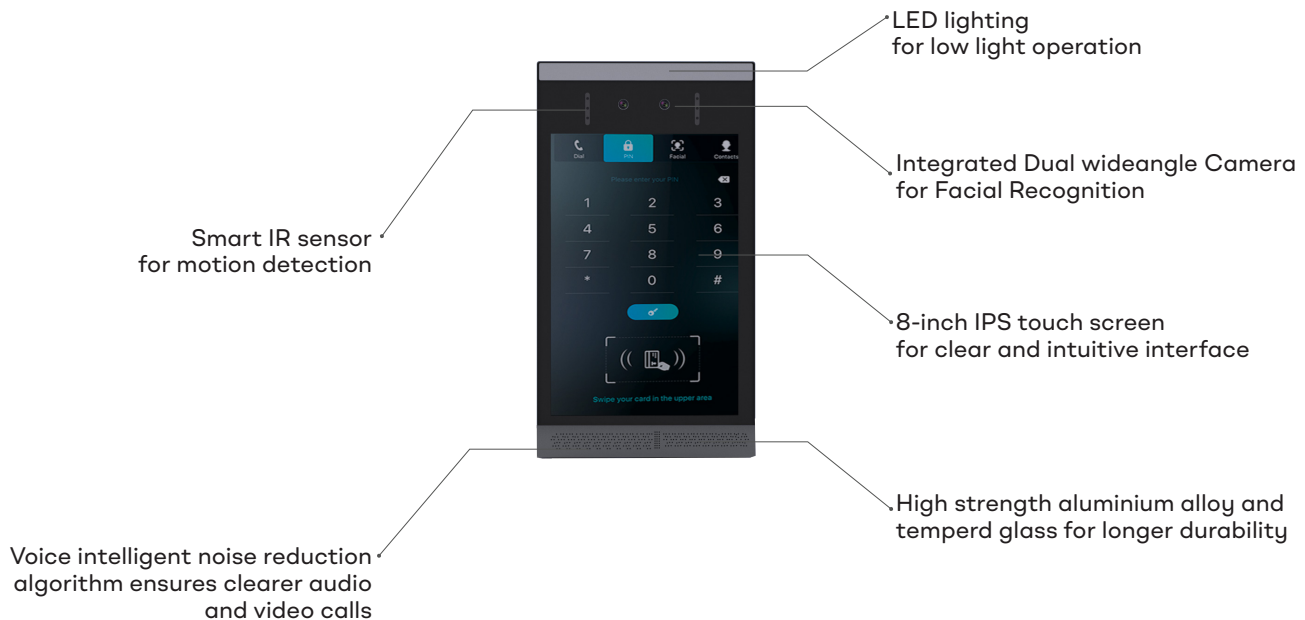

GENERAL



Communication

Ethernet



Access Card Number

10,000



Display

8-inch IPS Touch Screen,
800×1280 Resolution



Camera

2 MP Colour 2 MP IR Camera



Speaker

2 W



Wiegand Interface

Wiegand 26 / 34

MECHANICAL



Dimension (L x W x H)

123.8 mm x 20.5 mm x 240mm



Material

Aluminum



Installation

Wall-Mounted



Color

Gunmetal

ELECTRICAL



Power Supply

DC 12V / 2A or POE + (POE 802.3 at class 4)



Power Consumption

PoE: 7.9~23.1W

Adapter: 6.8~21.5W

ENVIRONMENTAL



Operating Temperature

-20°C to 55°C



IP Rating

IP66



Storage Temperature

-40°C to 70°C



Vandal Protection


IK07



Usage Environment

Indoor, Outdoor



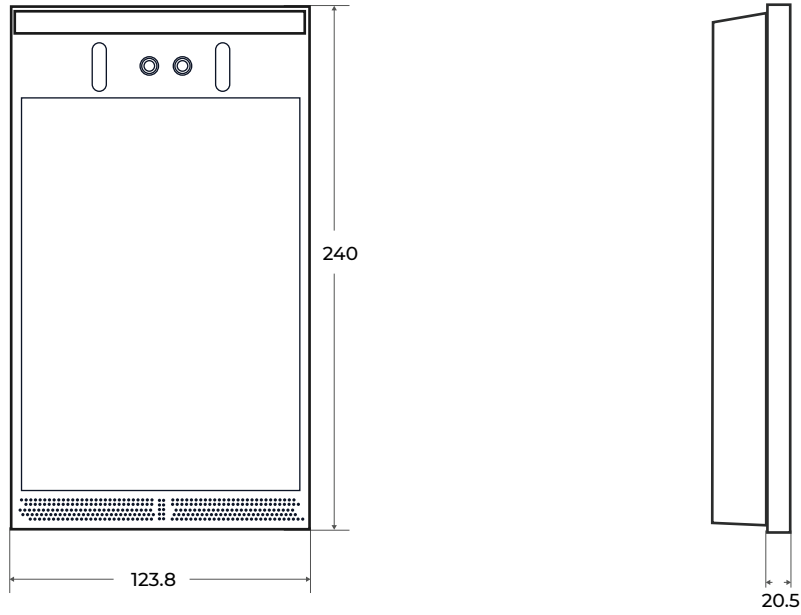

Note: all units are in mm

ORDERING INFO

VISPRO-IDS : INTERCOM DOOR STATION

